


DP-22C12D9T-A HD1080P Box Camera

TURBO HD

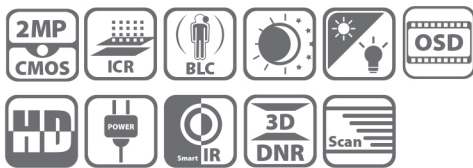

Key features

- HD1080P Video Output
- Adopt HDTV Technology
- True Day/Night
- 3D DNR, Smart IR
- True WDR, up to 120dB
- OSD menu controlled via UTC
- Alarm input & Output (DS-2CC12D9T-A)
- Dual voltage (DS-2CC12D9T-A)

| DP-22C12D9T-A | |
|----------------------------------|---|
| Camera | |
| Image Sensor | 2 MP CMOS Image Sensor |
| Signal System | PAL/NTSC |
| Effective Pixels | 1920(H)*1080(V) |
| Min. Illumination | Color : 0.01 Lux @(F1.2,AGC ON) B/W : 0.001 Lux @(F1.2,AGC ON) |
| Shutter Time | 1/25(1/30) s to 1/50,000 s |
| Lens Mount | C/CS mount |
| Auto-iris | ICR |
| Synchronization | Internal synchronization |
| WDR | 120dB |
| Video Frame Rate | 1080p@25fps/1080p@30fps |
| HD Video Output | 1 Analog HD output |
| CVBS Output | 1Vp-p Composite Output(75Ω/BNC) |
| S/N Ratio | More than 52dB |
| Menu | |
| Scene | Indoor, Outdoor, Indoor1, LOW-LIGHT |
| Camera ID | On/off (15 characters, position programmable) |
| AGC | Support |
| D/N Mode | Color/BW/EXT |
| White Balance | ATW, AWC-SET, Indoor, Outdoor, Manual |
| Privacy Mask | On/Off, maximum 8 zones |
| Motion Detection | On/Off, maximum 4 zones |
| BLC | Support |
| Anti-flicker | On/off |
| Language | English, Japanese, CHN1, CHN2, Korean, German, French, Italian, Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew and Arabic |
| Functions | Eclipse, Digital noise reduction, Digital zoom(62x), Slow shutter, Mirror, Defog, Defect pixel correction, SMART D-ZOOM |
| General | |
| Working Temperature/ Humidity | -30 °C – 60 °C (-22 °F – 140 °F) Humidity 90% or less (non-condensing) |
| Power Supply | 12 VDC; -A: 24 VAC, 12 VDC |
| Power Consumption | Max. 4.5W |
| Communication | Up the coax(need UTC controller) Protocol: Pelco-C(Coaxitron) |
| Dimensions | 69.8×58×145 mm (2.68" × 2.56" × 5.70") |
| Weight | 830g (1.83 lbs) |