

## DP-1216HUHI-K2 SERIES TURBO HD DVR

### Features and Functions



#### Video Input and Transmission

- Self-adaptive HDTVI/HDCVI/AHD/CVBS signal input
- Up to 16-ch 8 MP IP cameras input for DP-1216HUHI-K2
- 8 MP/5 MP/4 MP HDTVI video input and live view for DP-1216HUHI-K2
- Defogging function enabled for the supported analog cameras
- Long distance transmission over UTP and coaxial cable: max. 800m for 1080p and 1200m for 720p HDTVI signal

#### Compression and Recording

- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264 for the sub-stream of analog cameras
- Connectable to H.265+/H.265/H.264+/H.264 IP cameras DP-1216HUHI-K2
- H.265+ can be enabled to improve encoding efficiency and reduce data storage costs
- Recording at up to 8 MP resolution

#### Video Output

- Simultaneous HDMI/VGA output
- HDMI output at up to 4K (3840 × 2160) resolution for
- Separate CVBS output

#### Storage and Playback

- 2 SATA interfaces (up to 10 TB capacity per HDD)
- 8/16-ch synchronous playback
- Smart search for efficient playback
- Supports the third-party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

#### Smart Function

- Supports multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- Supports line crossing detection and intrusion detection of all channels, and 2-ch sudden scene change detection
- VCA information overlay in live view and smart playback
- VQD (Video Quality Diagnostics)


#### Network & Ethernet Access

- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- 1 RJ45 10M/100M/1000M self-adaptive Ethernet interface for DP-1216HUHI-K2
- Output bandwidth limit configurable

## Specifications

Model		DP-1216HUHI-K2
Video/Audio input	Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
	Analog video input	16-ch BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection
	HDTVI input	8 MP, 5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p30, 720p25
	AHD input	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30
	HDCVI input	4 MP, 1080p25, 1080p30, 720p25, 720p30
	CVBS input	PAL/NTSC
	IP video input	16-ch (up to 32-ch)
		Up to 8 MP resolution
		Supports H.265+/H.265/H.264+/H.264 IP cameras
	Audio compression	G.711u
Video/Audio output	Audio input	4-ch, RCA (2.0 Vp-p, 1 KΩ)
	CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480
	HDMI/VGA output	<b>VGA:</b> 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
		<b>HDMI:</b> 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
	Encoding resolution	8 MP/5 MP/4 MP/ 3 MP/1080p/720p/WD1/4CIF/VGA/CIF
	Frame rate	Main stream: 8 MP@8fps/5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)
		Sub-stream: WD1/4CIF/CIF@25fps (P)/30fps (N)
	Video bit rate	32 Kbps to 10 Mbps
	Audio output	1-ch, RCA (Linear, 1 KΩ)
	Audio bit rate	64 Kbps
Network management	Dual stream	Support
	Stream type	Video, Video & Audio
	Synchronous playback	16-ch
Hard disk	Incoming bandwidth	128 Mbps
	Remote connections	128
	Network protocols	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF
External interface	SATA	2 SATA interfaces
	Capacity	Up to 10 TB capacity for each disk
	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the 1 <sup>st</sup> audio input)
	Network interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface
	USB interface	Front panel: 1 × USB 2.0 Rear panel: 1 × USB 3.0
	Serial interface	RS-485 (half-duplex)
General	Alarm in/out	16/4
	Power supply	12VDC
	Consumption (without HDD)	≤ 25 W
	Working temperature	-10 °C to +55 °C (+14 °F to +131 °F)
	Working humidity	10% to 90%
	Dimensions (W × D × H)	380 × 320 × 48 mm (15.0 × 12.6 × 1.9 inch)
	Weight (without HDD)	≤ 2 kg (4.4 lb)

## Physical Interfaces

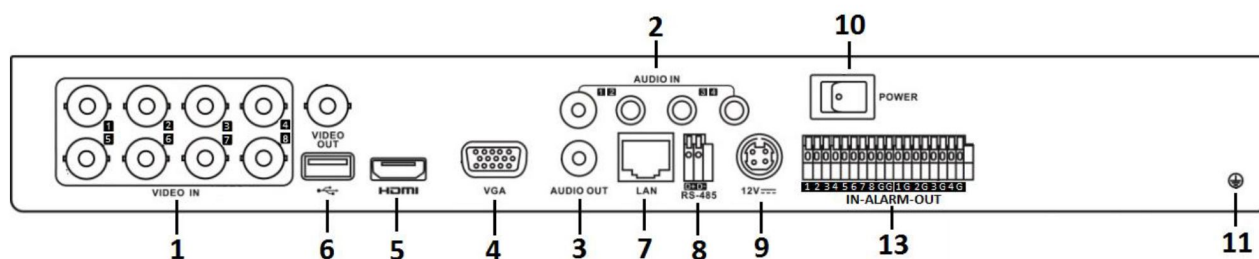

Index	Description	Index	Description
1	VIDEO IN	8	RS-485 Serial Interface
2	AUDIO IN, RCA Connector	9	12 VDC Power Input
3	AUDIO OUT, RCA Connector	10	Power Switch
4	VGA Interface	11	GND
5	HDMI Interface	12	VIDEO OUT
6	USB Interface	13	Alarm In/Out
7	LAN Network Interface		